

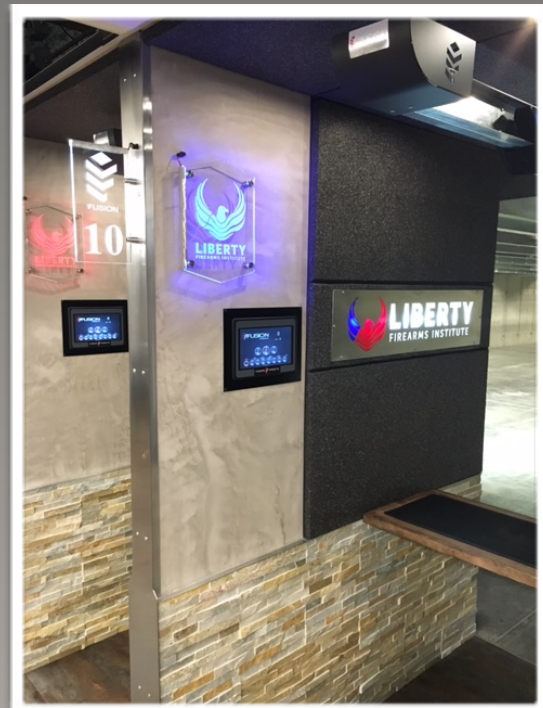






# FUSION TARGETS

## F1 Retriever Targets

You should spend more time sighting target faces and less time changing them. You can effortlessly select one of the present distances and watch the target carrier confidently leap to its position as you bring your your gun up to do what you came to the range to do: shoot. Fusion Targets F1 Retriever Targets are intuitive and responsive.

Steady, fast, and right where you want to punch holes: The Fusion F1 Retriever Target awaits your command.



-  Intuitive User Interface
-  Durable and Protected
-  Accurate Distance Placement
-  Cost Effective Investment

## Carrier

Frame	Zinc-plated monolithic frame
Dimensions	17" w x 4.5 " h
Deflector Plate	1/4: AR 500 with 30 degree degree deflection angle
Drive	1/8" coated aircraft cable

## Motor

Drive Controller	200-230v AC + 10-15% (50/60Hz) for higher reliability
Output Current	Continuous 2.8A, Max 8.4A
Speed	Adjustable / Programmable
Motor	200V Brushless Stepper
Motor Torque	33.8 lb/in

## Screen

Dimensions	10" x 7" Touch LCD Screen
Resolution	1024 x 600
Power	DC 12v - 28v
Ratings	Nema 1 rated, CE certified
Mounting	Flush mounted in stall

Max Length	100 yards or 100 meters
Increments	3' or 3 meter sections
Material	12 gauge galvanized mild steel
Hanging Points	15' span length
Weight	72 lbs. per handing point @ 15' span

